


Limited Space Application Welded Metal Diaphragm Flanged Seal

Type SFX

Model Specific Information


- ✓ SFX models are one-piece all welded construction with an integrated raised face ANSI B16.5 class flange seal surface in a continuous duty application.
- ✓ Ideal for viscous process environments with self cleaning flush diaphragm face.
- ✓ Ideal for Gas and Liquid applications and compatible with most transmitters, transducers, pressure switches, pressure gauges, etc.
- ✓ SFX models are used for pressure-only applications and comes in standard ANSI Class ratings of 1/2" 150# to 3" 2500# and 4" 150# thru 300#.
- ✓ Standard design operation to 2,500 psi (172 bar) at 100°F (38°C).

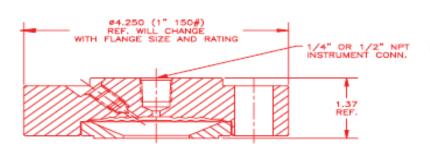



TYPE SFX 1" 150# - 2500# MAX. PRESSURE: 2500 PSI @ 100°F

096-386

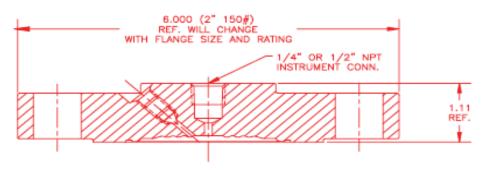

TYPE SFX 2" THRU 4" 150# - 2500# MAX. PRESSURE: 2500 PSI @ 100*F

