
Low Pressure Application Elastomer Diaphragm Saddle Seal

Type LJ

Model Specific Information

- ✓ LJ models are inline saddle mount attached.
- ✓ Standard design operation to 1,250 PSI (86 bar) at 100°F (38°C).

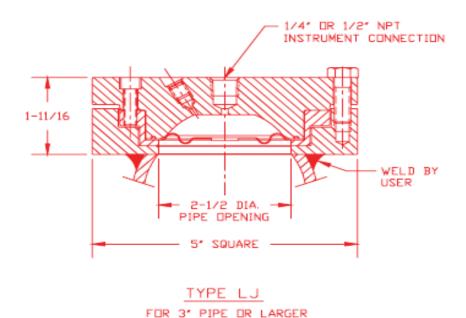

1250 PSI @ 100° F