




General Corrosive Application Teflon Diaphragm Saddle Seal Type TJ

Model Specific Information

- ✓ TJ models are **inline saddle mount attached**.
- ✓ **Standard** schedule is **Schedule 40**.
- ✓ **Standard** design operation to **1,500 PSI (103 bar)** at **100°F (38°C)**.

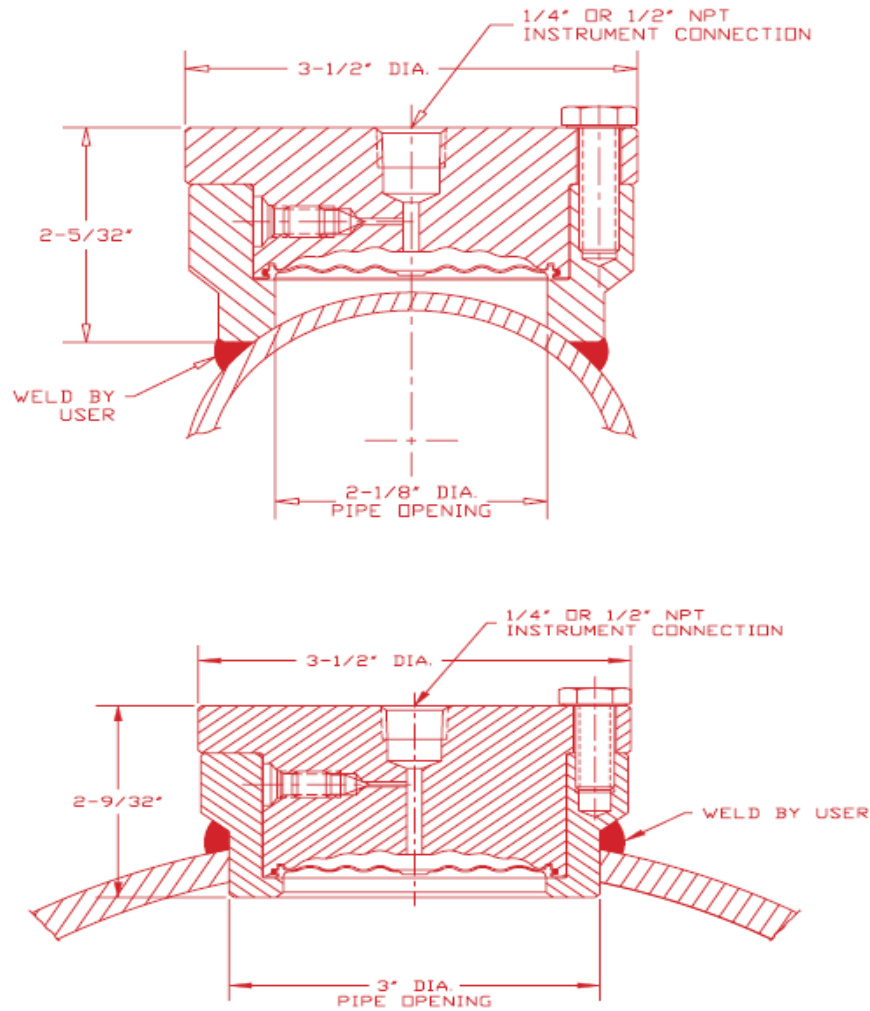

Master Gauge Co.



WHEN UNDER PRESSURE THINK OF US!

1150 W. GRAND AVE. CHICAGO, IL 60642 - TOLL-FREE: 1-800-259-2705 - PHONE: 1-312-666-2705 - FAX: 1-312-666-6458 - MASTERGAUGE.CO.COM

© 2009, AMETEK, Inc., All Rights Reserved.