



302LFW ALL SS BACK MOUNT

Our '300' series pressure gauge line is a high quality line of stainless steel gauges. Glycerine filling the gauge prevents dust, dirt or other contaminants from entering the case of the gauge and attacking the movement or internals of the gauge. Keeping out such contaminants prolongs the life of the gauge.


This gauge has been specifically designed with original equipment manufacturers in mind. It is typically used in chemical processing or food processing applications as well as any commercial or industrial application where stainless steel components are required.

SPECIFICATIONS:

- **Available Dial Sizes:** 1 ½", 2", 2 ½", 3 ½", 4"
- **Available Connection Sizes:**
1/8"MNPT on 1 ½" and 2"
1/4"MNPT on 2", 2 ½", 3 ½" and 4"
- **Stainless Steel Case, Crimped Bezel**
- **316SS Bourdon Tube, SS Internals**
- **316SS Connection Welded at Case**
- **Built-in Snubber**
- **Plastic Lens**
- **Liquid Filled (Dry Available)**
- **Accuracy :** 2 ½"Dial = 1.5 %
4" and 6" Dial = 1 %
- **Dual Scale: PSI & Bar (x100=kPa)**
Single Scale available from stock
- **Ambient temperature:** FILLED: 30°F to 160°F
DRY: -30°F to 180°F



RANGE	CODE	Major In	Minor in
30/0"VAC	A	5	0.5
30/0/15	CB	5	0.5
30/0/30	CC	10	1
30/0/60	CD	10	1
30/0/100	CE	20	2
30/0/150	CF	20	2
30/0/300	CH	50	10
0/15	B	2	0.2
0/30	C	5	0.5
0/60	D	10	1
0/100	E	20	2
0/160	F	20	2
0/200	G	40	5
0/300	H	50	5
0/400	I	50	5
0/600	K	100	10
0/1000	M	200	20
0/1500	N	200	20
0/2000	O	400	50
0/3000	P	500	50
0/5000	R	1000	100
0/10,000	U	1000	100
0/15,000	V	2000	200

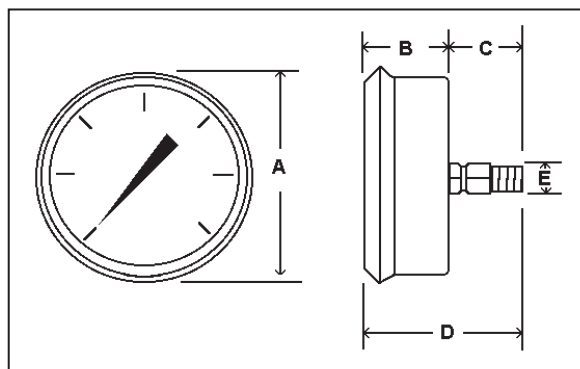

		A	B	C	D	E
1 ½"	In	1.88	1.06	.89	1.95	1/8"
Dial	MM	48	27	23	50	NPT
2"	In	2.23	1.09	.71	1.99	1/8" OR
Dial	MM	57	28	23	51	1/4"NPT
2 ½"	In	2.80	1.28	1.19	2.46	1/4"
Dial	MM	71	33	30	63	NPT
3 ½"	In	3.83	1.14	1.08	2.20	1/4"
Dial	MM	97	29	27	56	NPT
4"	In	4.32	1.63	1.14	2.77	1/4"
Dial	MM	110	42	29	71	NPT

Note: All Dial Size Gauges are Center Back Connection Except 3 ½" Dial Size which are Lower Back Connection