



TRI-CLAMP SANITARY GAUGE

Dial: 2 1/2" or 4" Diameter

Case: Stainless Steel

Hermetically sealed & Liquid Fillable Standard

Lens: Laminated Safety Glass

Pointer: Micrometer Adjustable

Bourdon Tube: AISI 316 Stainless Steel

Socket: AISI 316 Stainless


Accuracy: 4" Dial = 0.5 % Full Scale

2 1/2" Dial = 1.0 % Full Scale

Movement: Heavy Duty 300 series SS

STANDARD FEATURES

- Overload and Underload Stops
- Laminated Safety Glass Lens
- Hermetically Sealed/Weather Proof
- Liquid Fillable Out of The Box / No Kit Required
 - Original Product • Best Product • Best Value

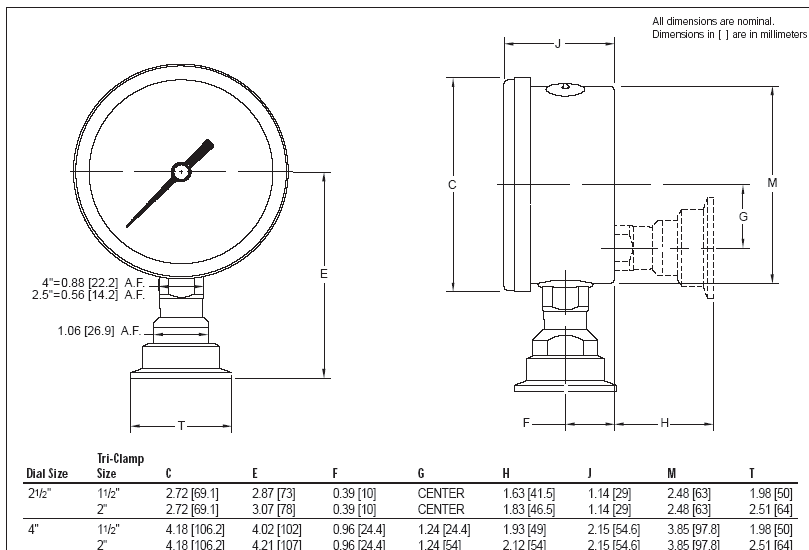

These gauges have been designed to meet 3A requirements for the dairy and food processing industries.

Currently we do not have 3A certification for our standard stock products.


If 3A certification or stamp is required for your application, please specify that you require 3A rating when requesting your quote.

These gauges conform to ANSI B40.1



43A1

PART NUMBERING SYSTEM:

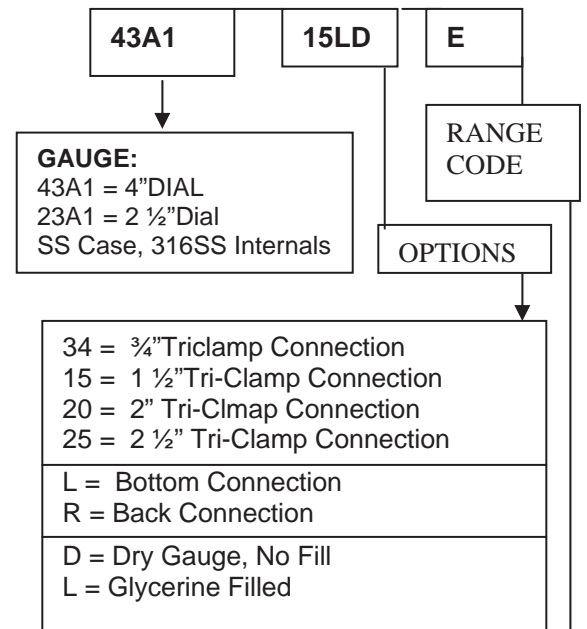

Code	Range
A	30"Hg-0
CB	30"Hg-0-15 psi
CC	30"Hg-0-30 psi
CD	30"Hg-0-60 psi
CE	30"Hg-0-100 psi
CF	30"Hg-0-150 psi
CH	30"Hg-0-300 psi
B	0-15
C	0-30
D	0-60
E	0-100
F	0-160
G	0-200
H	0-300