



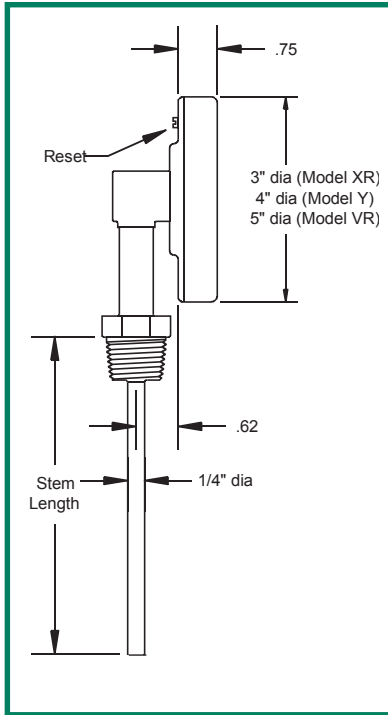

Bimetal Thermometers Industrial 3", 4", 5" Dial

**Bottom Connected
(Straight Form)**

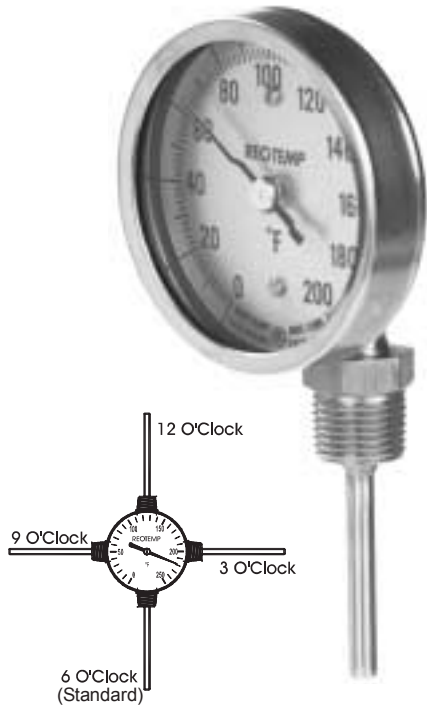

REOTEMP

Straight Form
thermometers

are ideal for
side and elevated installations
on tops or sides of tanks or
pipes.



Standard Features

- Bottom, Top, Right or Left Side Mounting
- All Stainless Steel Construction
- Hermetically Sealed (ASME B40.3)
- Accurate to 1% of Full Scale
- Standard External Reset
- Silicone Fillable for Vibration

How to Order

XR

060

1

F43

SF

| Models | Stem Length | Connection | Temperature Ranges <small>See pg.13 for a full list.</small> | Options |
|---|---|---|---|---|
| Standard Models | | Standard Threaded* | Fahrenheit Ranges | |
| XR = Model XR (3" dial, reset) | 025 = 2.5" | 1 = 1/2" NPT (std.) | F23 -40 TO 160°F | PS = Pointed Stem |
| YY = Model Y (4" dial, reset) | 040 = 4" | 4 = 1/4" NPT | F55* 25 TO 125°F | SF = Silicone Fill (max temp 550°F) |
| VR = Model VR (5" dial, reset) | 060 = 6" | 5 = 3/4" NPT adapter | F43 0 TO 200°F | SS = 316 SS Stem |
| | 090 = 9" | Sanitary* | F47 0 TO 250°F | F3 = 3/8" dia. Stem |
| | 120 = 12" | C = 1-1/2" Tri-Clamp | F63 50 TO 300°F | PC = Acrylic Window |
| | 150 = 15" | L = 2" Tri-Clamp | F67 50 TO 500°F | PY = Polycarbonate Window |
| | 180 = 18" | M = 3/4" Tri-Clamp | F81 150 TO 750°F | TG = Tempered Glass Window |
| | 240 = 24" | For more information on Sanitary Thermometers see page 12 | F85 200 TO 1000°F | MM = Max/Min Pointer |
| | 300 = 30" | | Celsius Ranges | 99 = 9 O'Clock Stem (left side) |
| Non-Reset Models | | | C23 -40 TO 70°C | 33 = 3 O'Clock Stem (right side) |
| XX = Model X (3" dial, no reset) | 150 = 15" | | C55* 0 TO 50°C | 12 = 12 O'Clock Stem (top mount) |
| YN = Model YN (4" dial, no reset) | 180 = 18" | | C43 0 TO 100°C | |
| VV = Model V (5" dial, no reset) | 240 = 24" | | C47 -20 TO 120°C | |
| | 300 = 30" | | C59 0 TO 150°C | |
| | 360 = 36" | | C67 0 TO 250°C | |
| | -Intermediate lengths available up to 80" | | C81 0 TO 400°C | |
| | -Specify length in inches + tenths | | C85 100 TO 500°C | |
| | | | Dual F/C Ranges | |
| | | | D23 -40 TO 160°F & -40 TO 70°C | |
| | | | D55* 25 TO 125°F & 0 TO 50°C | |
| | | | D43 0 TO 200°F & 0 TO 100°C | |
| | | | D47 0 TO 250°F & -20 TO 120°C | |
| | | | D63 50 TO 300°F & 10 TO 150°C | |
| | | | D67 50 TO 500°F & 0 TO 250°C | |
| | | | D81 150 TO 750°F & 0 TO 400°C | |
| | | | D85 200 TO 1000°F & 100 TO 500°C | |
| | | *-Other sizes available | *-Not available in 2.5" stem. | |